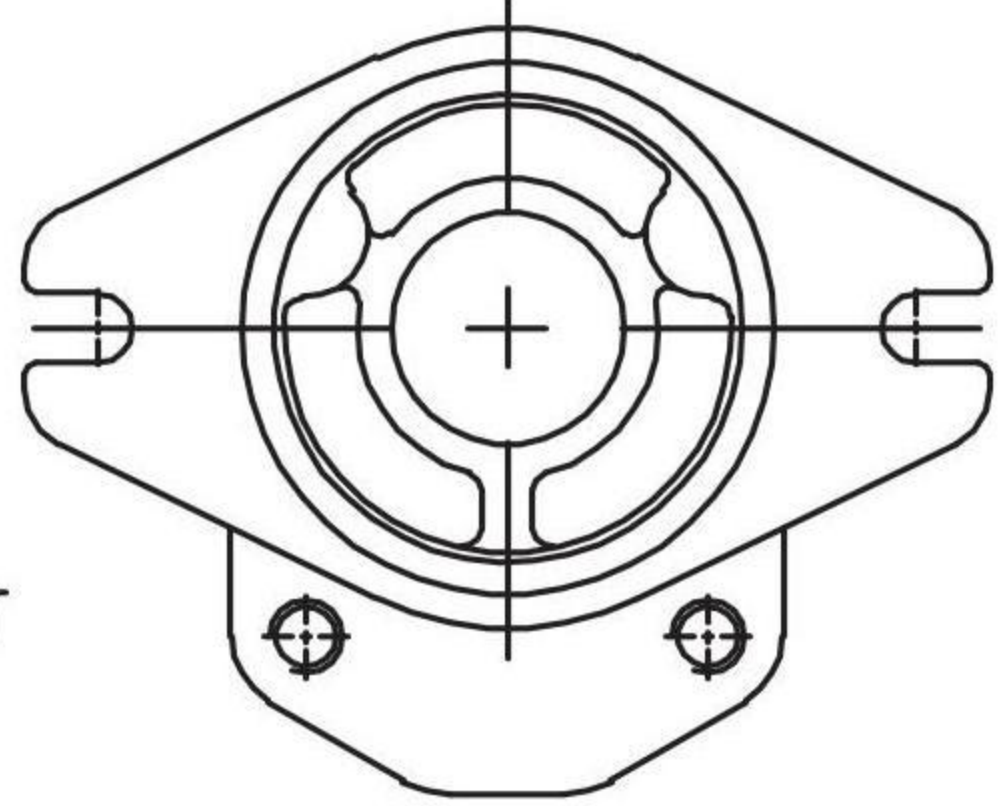

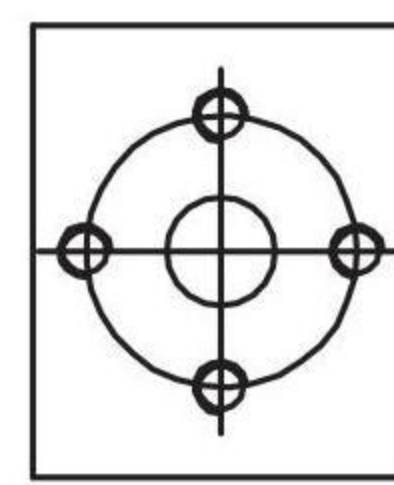
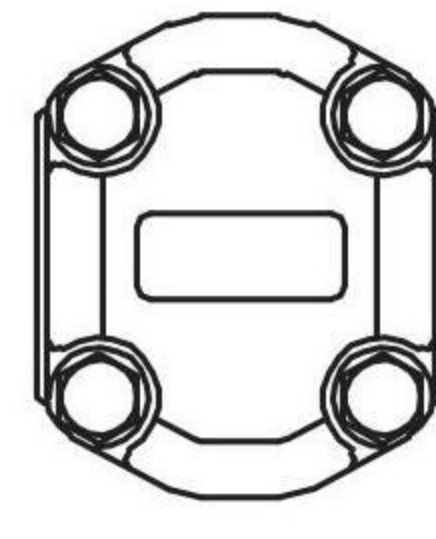

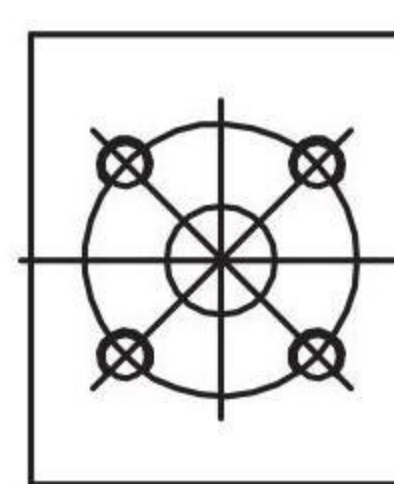
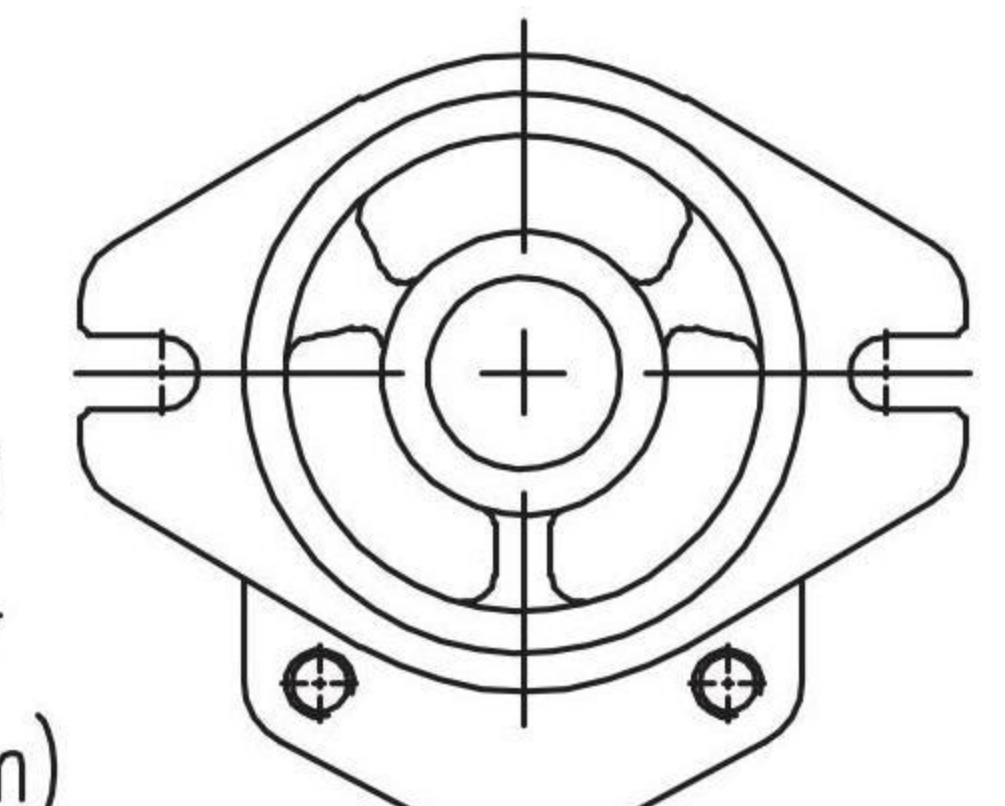

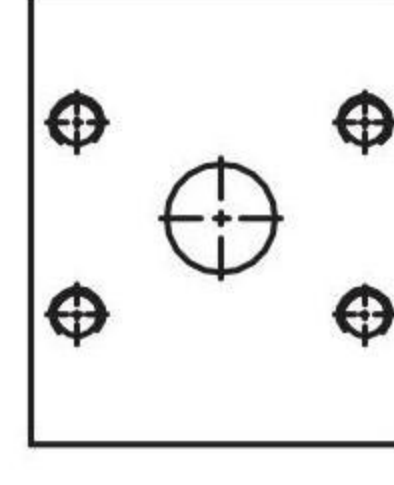

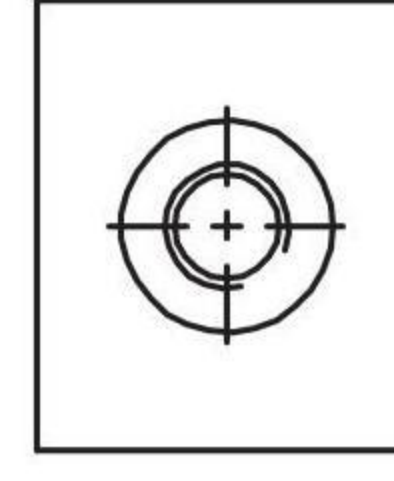

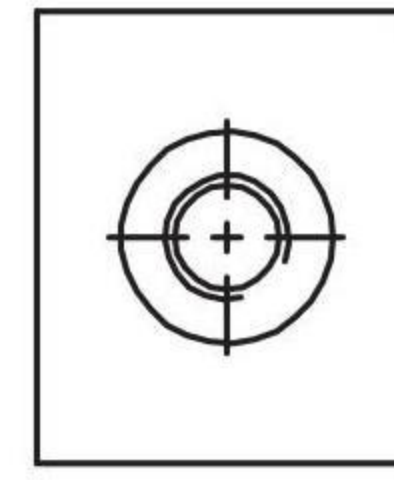

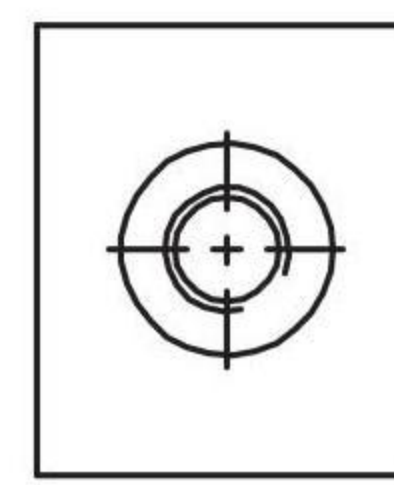

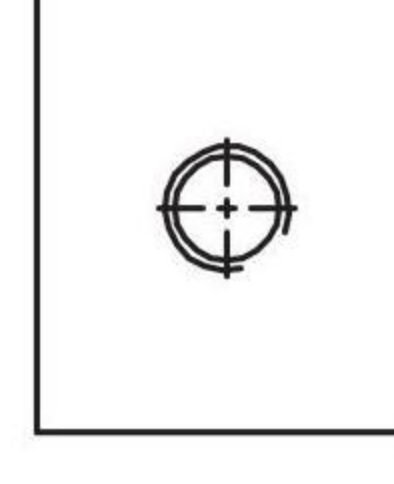

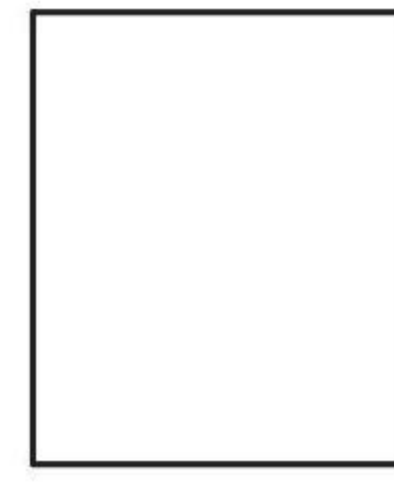



2.5系列选型规则/Group 2.5 Ordering Code Rules

B	A	P	2.5	A0	D	10	C0	Z0	省略/omit	省略/omit	省略/omit
博顿 Boden	材质 Material	功能 Function	系列 Group	前盖 Front cover	旋向 Rotation	排量 Displacement	轴伸 Shaft	泵体油口 Ports	特殊结构 Special structure	可选项 Options	其他 Other
A	前、后盖材料为铝合金 Front and end cover material aluminum	P 泵 Pump	2.5 2.5系列 Group 2.5		D 顺时针转 Clockwise S 逆时针转 Counter clockwise	10 12.5 14 16 18 19 20 23 25 26.5 28 30 32 36 40					特殊设计 special designing
H	前、后盖材料为铸铁，压力比铝盖高 30bar。 Front and end cover material cast iron, pressure 30 bar higher than aluminum covers									可选项 Options	
										省略-温度范围在-10℃~+80℃, 进口口最高绝对压力为3bar。 Omit-Range between -10℃ and +80℃, inlet pressure up to max. 3 bar absolute.	
										V 适用于高温介质，温度范围在-10℃~+120℃。 Version suitable for fluid at hi-temperatures, range between -10℃ and +120℃.	
										H 适用于低温介质，温度范围在-40℃~+80℃。 Version suitable for fluid at low-temperatures, range between -40℃ and +80℃.	
										N 适用于进口口最大绝对压力3~10bar。 Version suitable for inlet pressure up to max. 3 and 10 bar absolute.	
										如需其它特殊选项请联系本公司工程师 For other special options, please contact our engineers.	

前盖 Front cover		轴伸 Shaft		泵体油口 Ports		特殊结构 Special structure	
A0	菱形前盖(止口φ85) Diamond front cover (centering φ85mm) 	C0	平键轴 φ20 straight keyed φ20 	E	矩形法兰 Rectangular flange 	省略-默认普通 omit-regular 	
		C1	平键轴 φ18 straight keyed φ18 	F	矩形法兰 Rectangular flange 		
A1	菱形前盖(止口φ82.55) Diamond front cover (centering φ82.55mm) 	C2	平键轴 φ19.05 straight keyed φ19.05 	F	矩形法兰 Split flange 		
		H0	矩形花键轴 Rectangle spline shaft JL 6-20x16x4 	Z	公制螺纹 (M) Metric thread 		
		H1	矩形花键轴 Rectangle spline shaft JL 4-18x15x5 	L	英制管螺纹 (G) Gas thread 		
		S0	渐开线花键轴 Involute spline shaft EXT12Z-1.5m-30° 	U	美制管螺纹 (UNF-2B) UNF thread 		
		S1	SAE花键轴 SAE spline shaft DP16/32-30°-10T 	R	英制锥螺纹 (PT) PT thread 		
		S2	SAE花键轴 SAE spline shaft DP16/32-30°-11T 	X	泵体无油口 Body without ports 		
		S3	SAE花键轴 SAE spline shaft DP16/32-30°-13T 详见 136 页 See page 136 for details 			详见 137-138 页 See page 137-138 for details	